



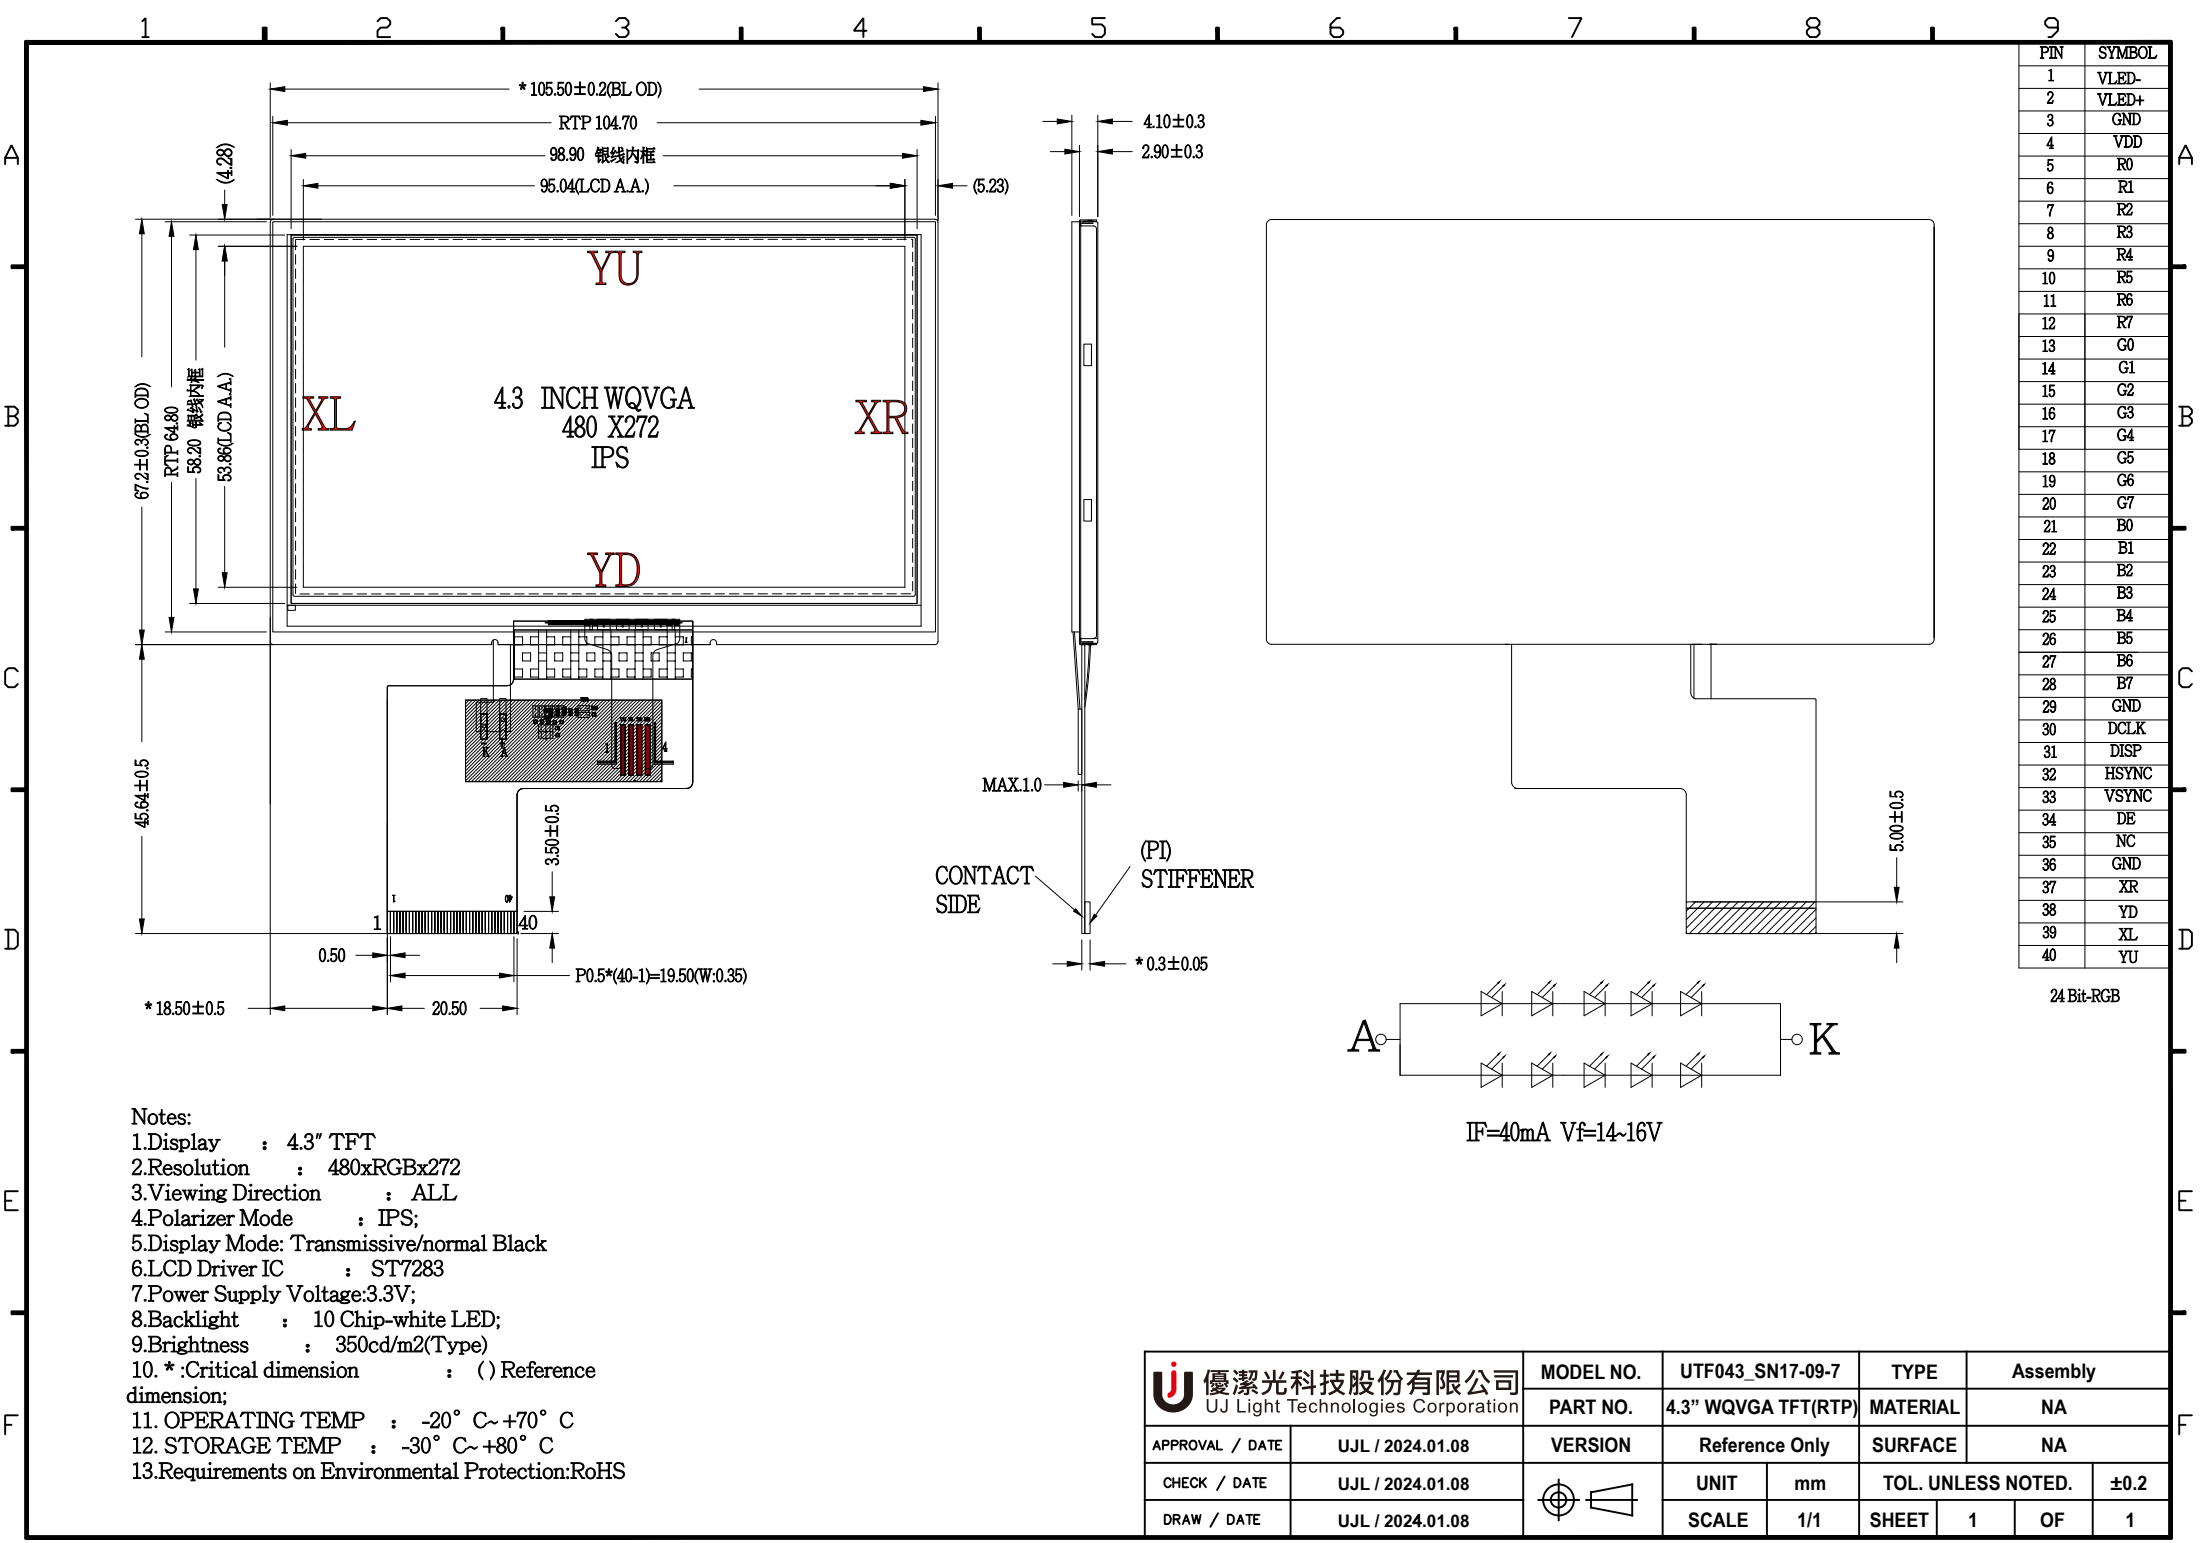


PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

24 Bit-RGB



IF=40mA Vf=14~16V

- Notes:
- 1.Display : 4.3" TFT
 - 2.Resolution : 480xRGBx272
 - 3.Viewing Direction : ALL
 - 4.Polarizer Mode : IPS;
 - 5.Display Mode: Transmissive/normal Black
 - 6.LCD Driver IC : ST7283
 - 7.Power Supply Voltage:3.3V;
 - 8.Backlight : 10 Chip-white LED;
 - 9.Brightness : 350cd/m2(Type)
 - 10.*:Critical dimension : () Reference dimension;
 11. OPERATING TEMP : -20° C~+70° C
 12. STORAGE TEMP : -30° C~+80° C
 - 13.Requirements on Environmental Protection:RoHS

 優潔光科技股份有限公司 UJ Light Technologies Corporation	MODEL NO.	UTF043_SN17-09-7	TYPE	Assembly			
	PART NO.	4.3" WQVGA TFT(RTP)	MATERIAL	NA			
APPROVAL / DATE	UJL / 2024.01.08	VERSION	Reference Only	SURFACE	NA		
CHECK / DATE	UJL / 2024.01.08		UNIT	mm	TOL. UNLESS NOTED.		±0.2
DRAW / DATE	UJL / 2024.01.08		SCALE	1/1	SHEET	1	OF 1