
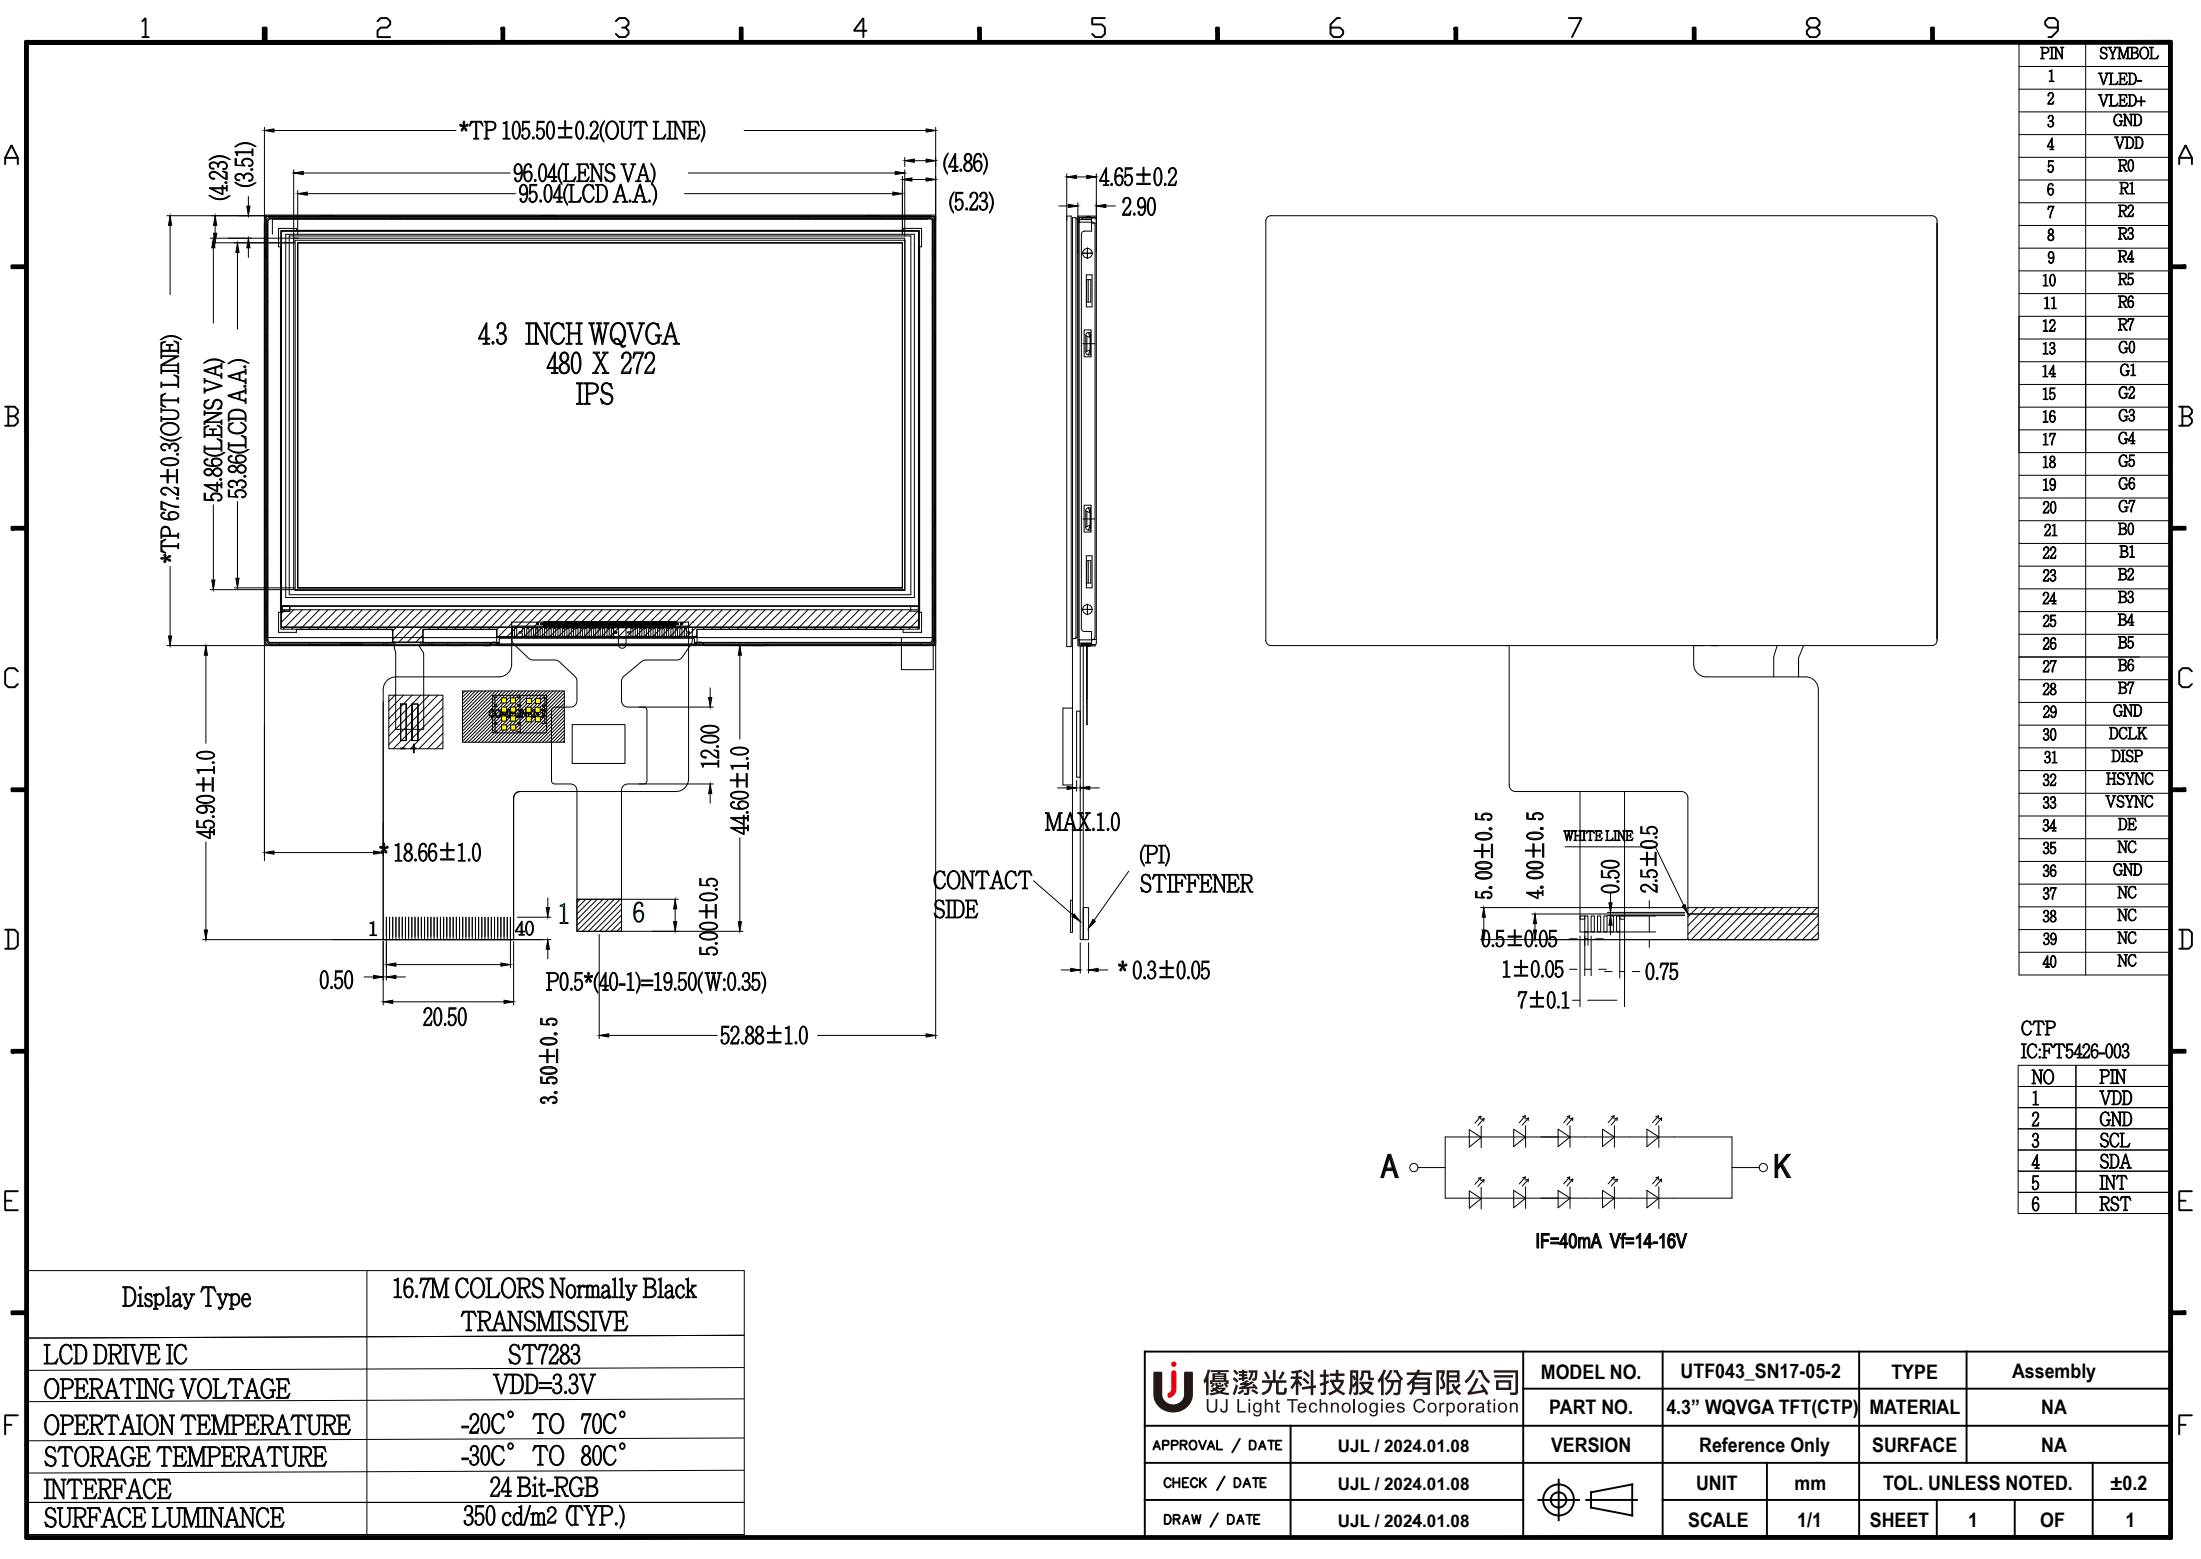




PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

CTP	
IC:FT5426-003	
NO	PIN
1	VDD
2	GND
3	SCL
4	SDA
5	INT
6	RST

Display Type	16.7M COLORS Normally Black TRANSMISSIVE
LCD DRIVE IC	ST7283
OPERATING VOLTAGE	VDD=3.3V
OPERTAION TEMPERATURE	-20C° TO 70C°
STORAGE TEMPERATURE	-30C° TO 80C°
INTERFACE	24 Bit-RGB
SURFACE LUMINANCE	350 cd/m2 (TYP.)

 優潔光科技股份有限公司 UJ Light Technologies Corporation		MODEL NO.	UTF043_SN17-05-2		TYPE	Assembly		
		PART NO.	4.3" WQVGA TFT(CTP)		MATERIAL	NA		
APPROVAL / DATE	UJL / 2024.01.08	VERSION	Reference Only		SURFACE	NA		
CHECK / DATE	UJL / 2024.01.08		UNIT	mm	TOL. UNLESS NOTED.			±0.2
DRAW / DATE	UJL / 2024.01.08		SCALE	1/1	SHEET	1	OF	1