



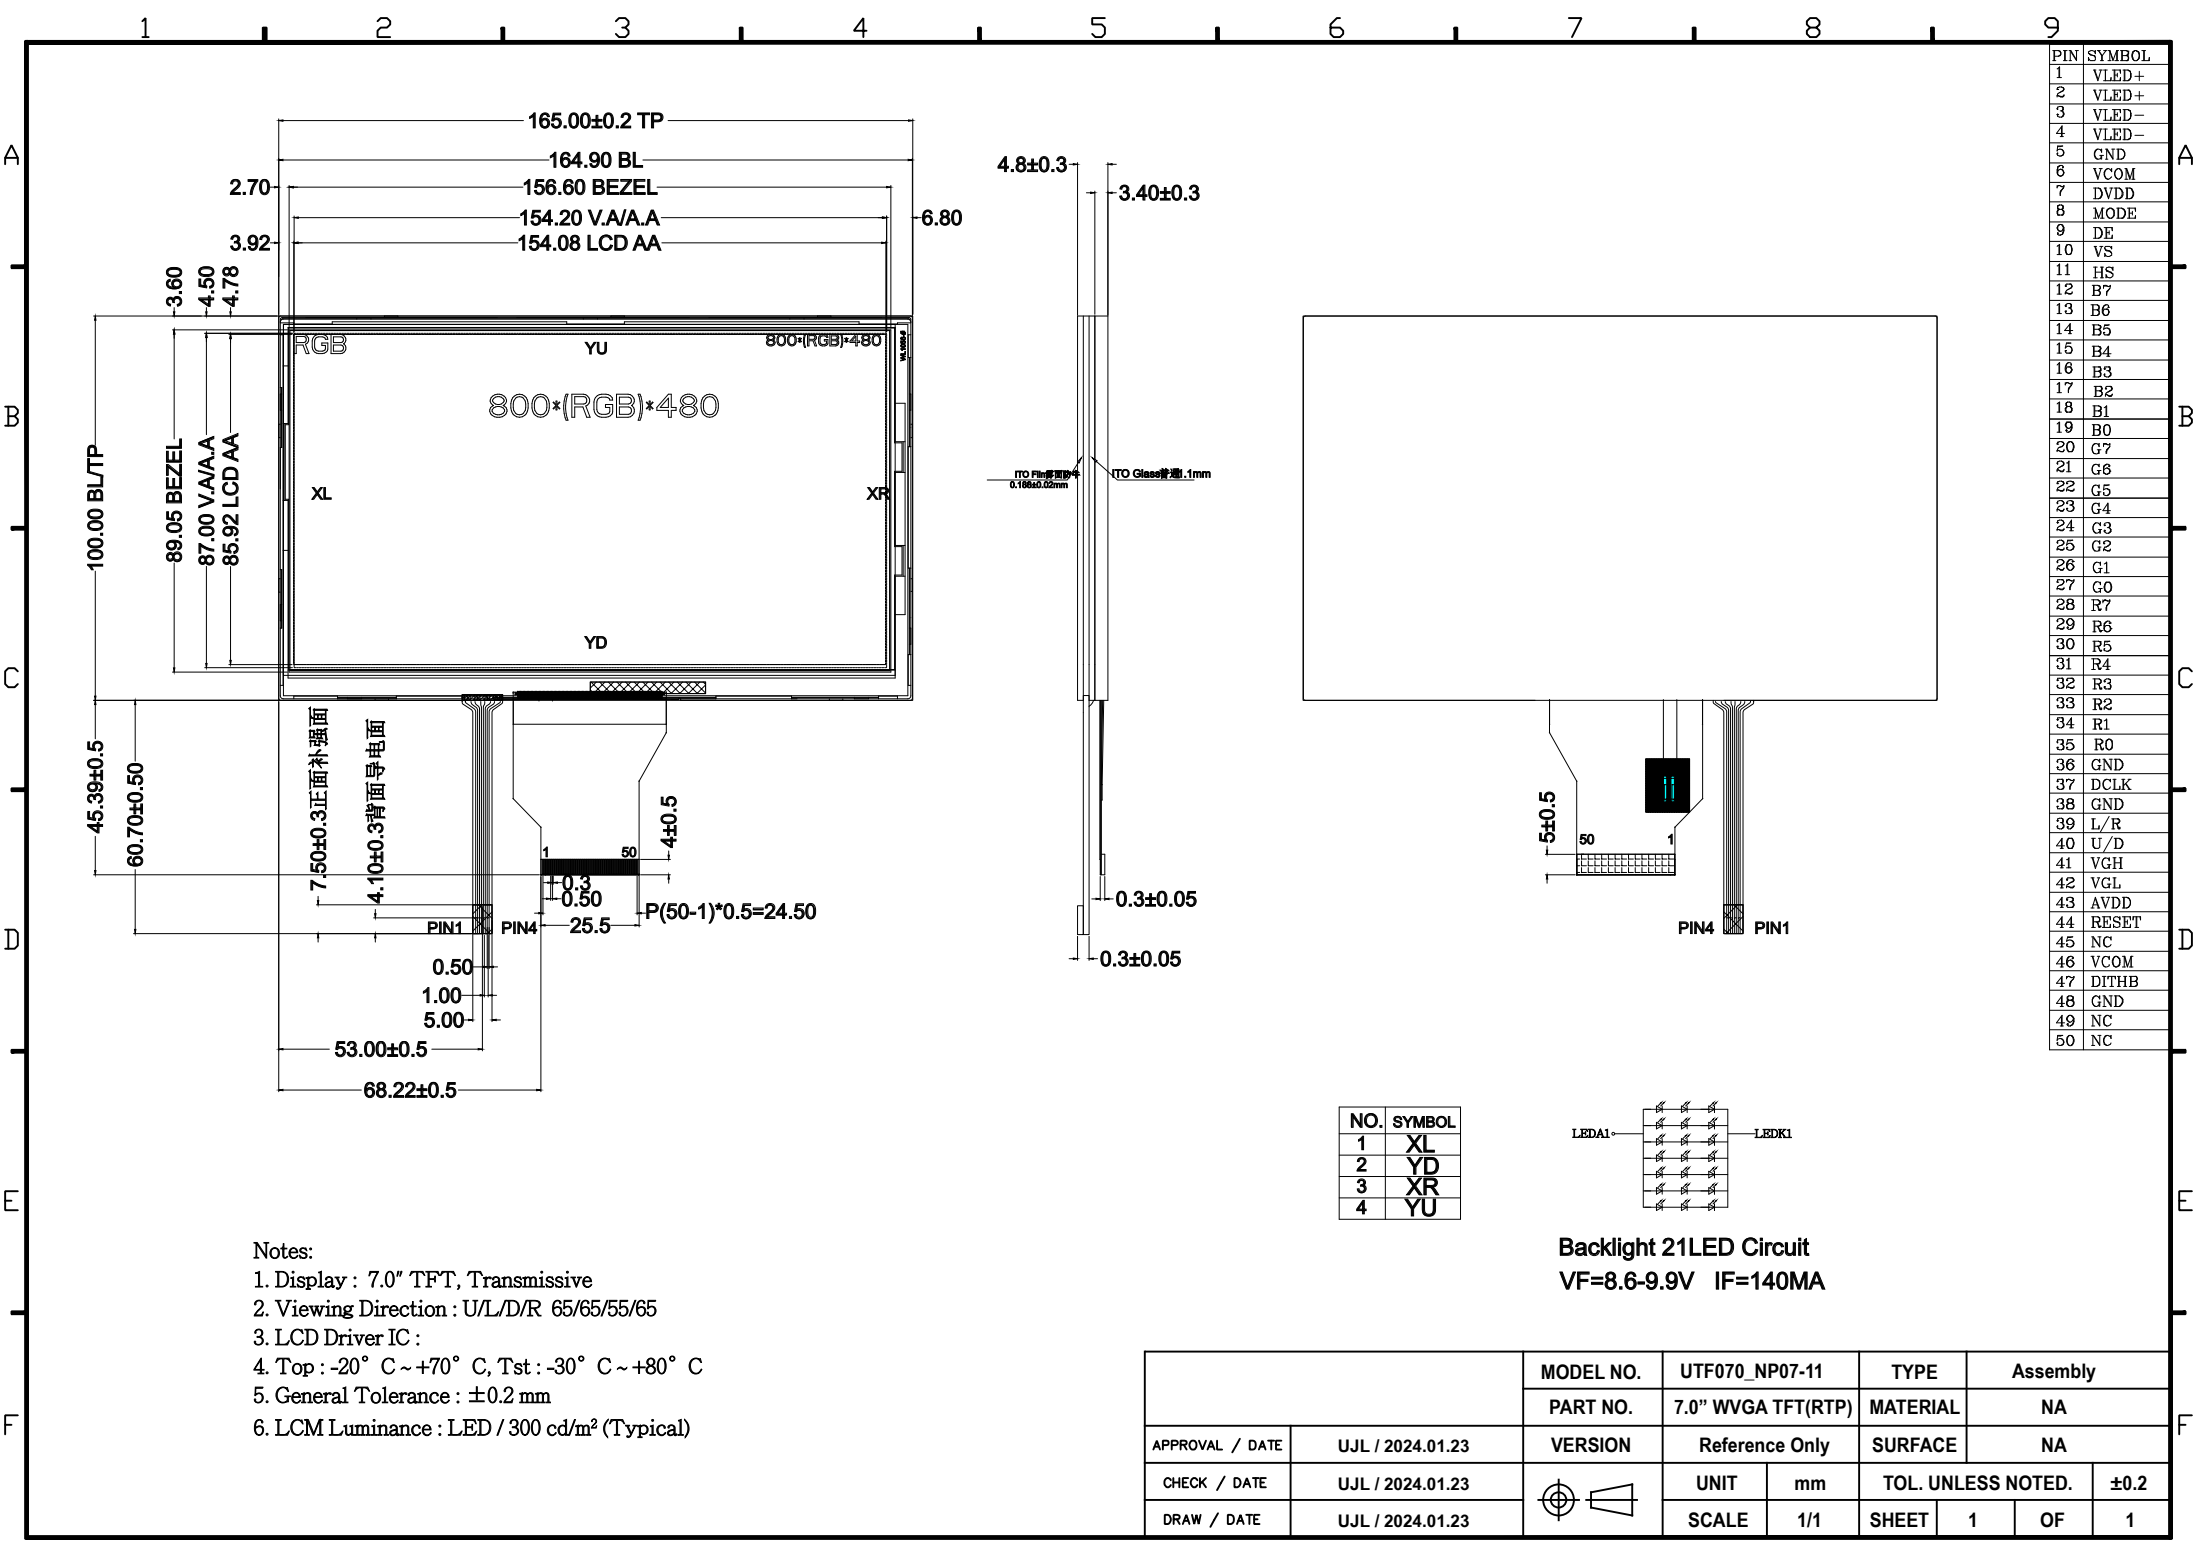

- Notes:
1. Display : 7.0" TFT, Transmissive
 2. Viewing Direction : U/L/D/R 65/65/55/65
 3. LCD Driver IC :
 4. Top : -20° C ~ +70° C, Tst : -30° C ~ +80° C
 5. General Tolerance : ±0.2 mm
 6. LCM Luminance : LED / 300 cd/m² (Typical)

NO.	SYMBOL
1	XL
2	YD
3	XR
4	YU



Backlight 21LED Circuit
VF=8.6-9.9V IF=140MA

		MODEL NO.	UTF070_NP07-11		TYPE	Assembly			
		PART NO.	7.0" WVGA TFT(RTP)		MATERIAL	NA			
APPROVAL / DATE	UJL / 2024.01.23	VERSION	Reference Only		SURFACE	NA			
CHECK / DATE	UJL / 2024.01.23		UNIT	mm	TOL. UNLESS NOTED.		±0.2		
DRAW / DATE	UJL / 2024.01.23		SCALE	1/1	SHEET	1	OF	1	