


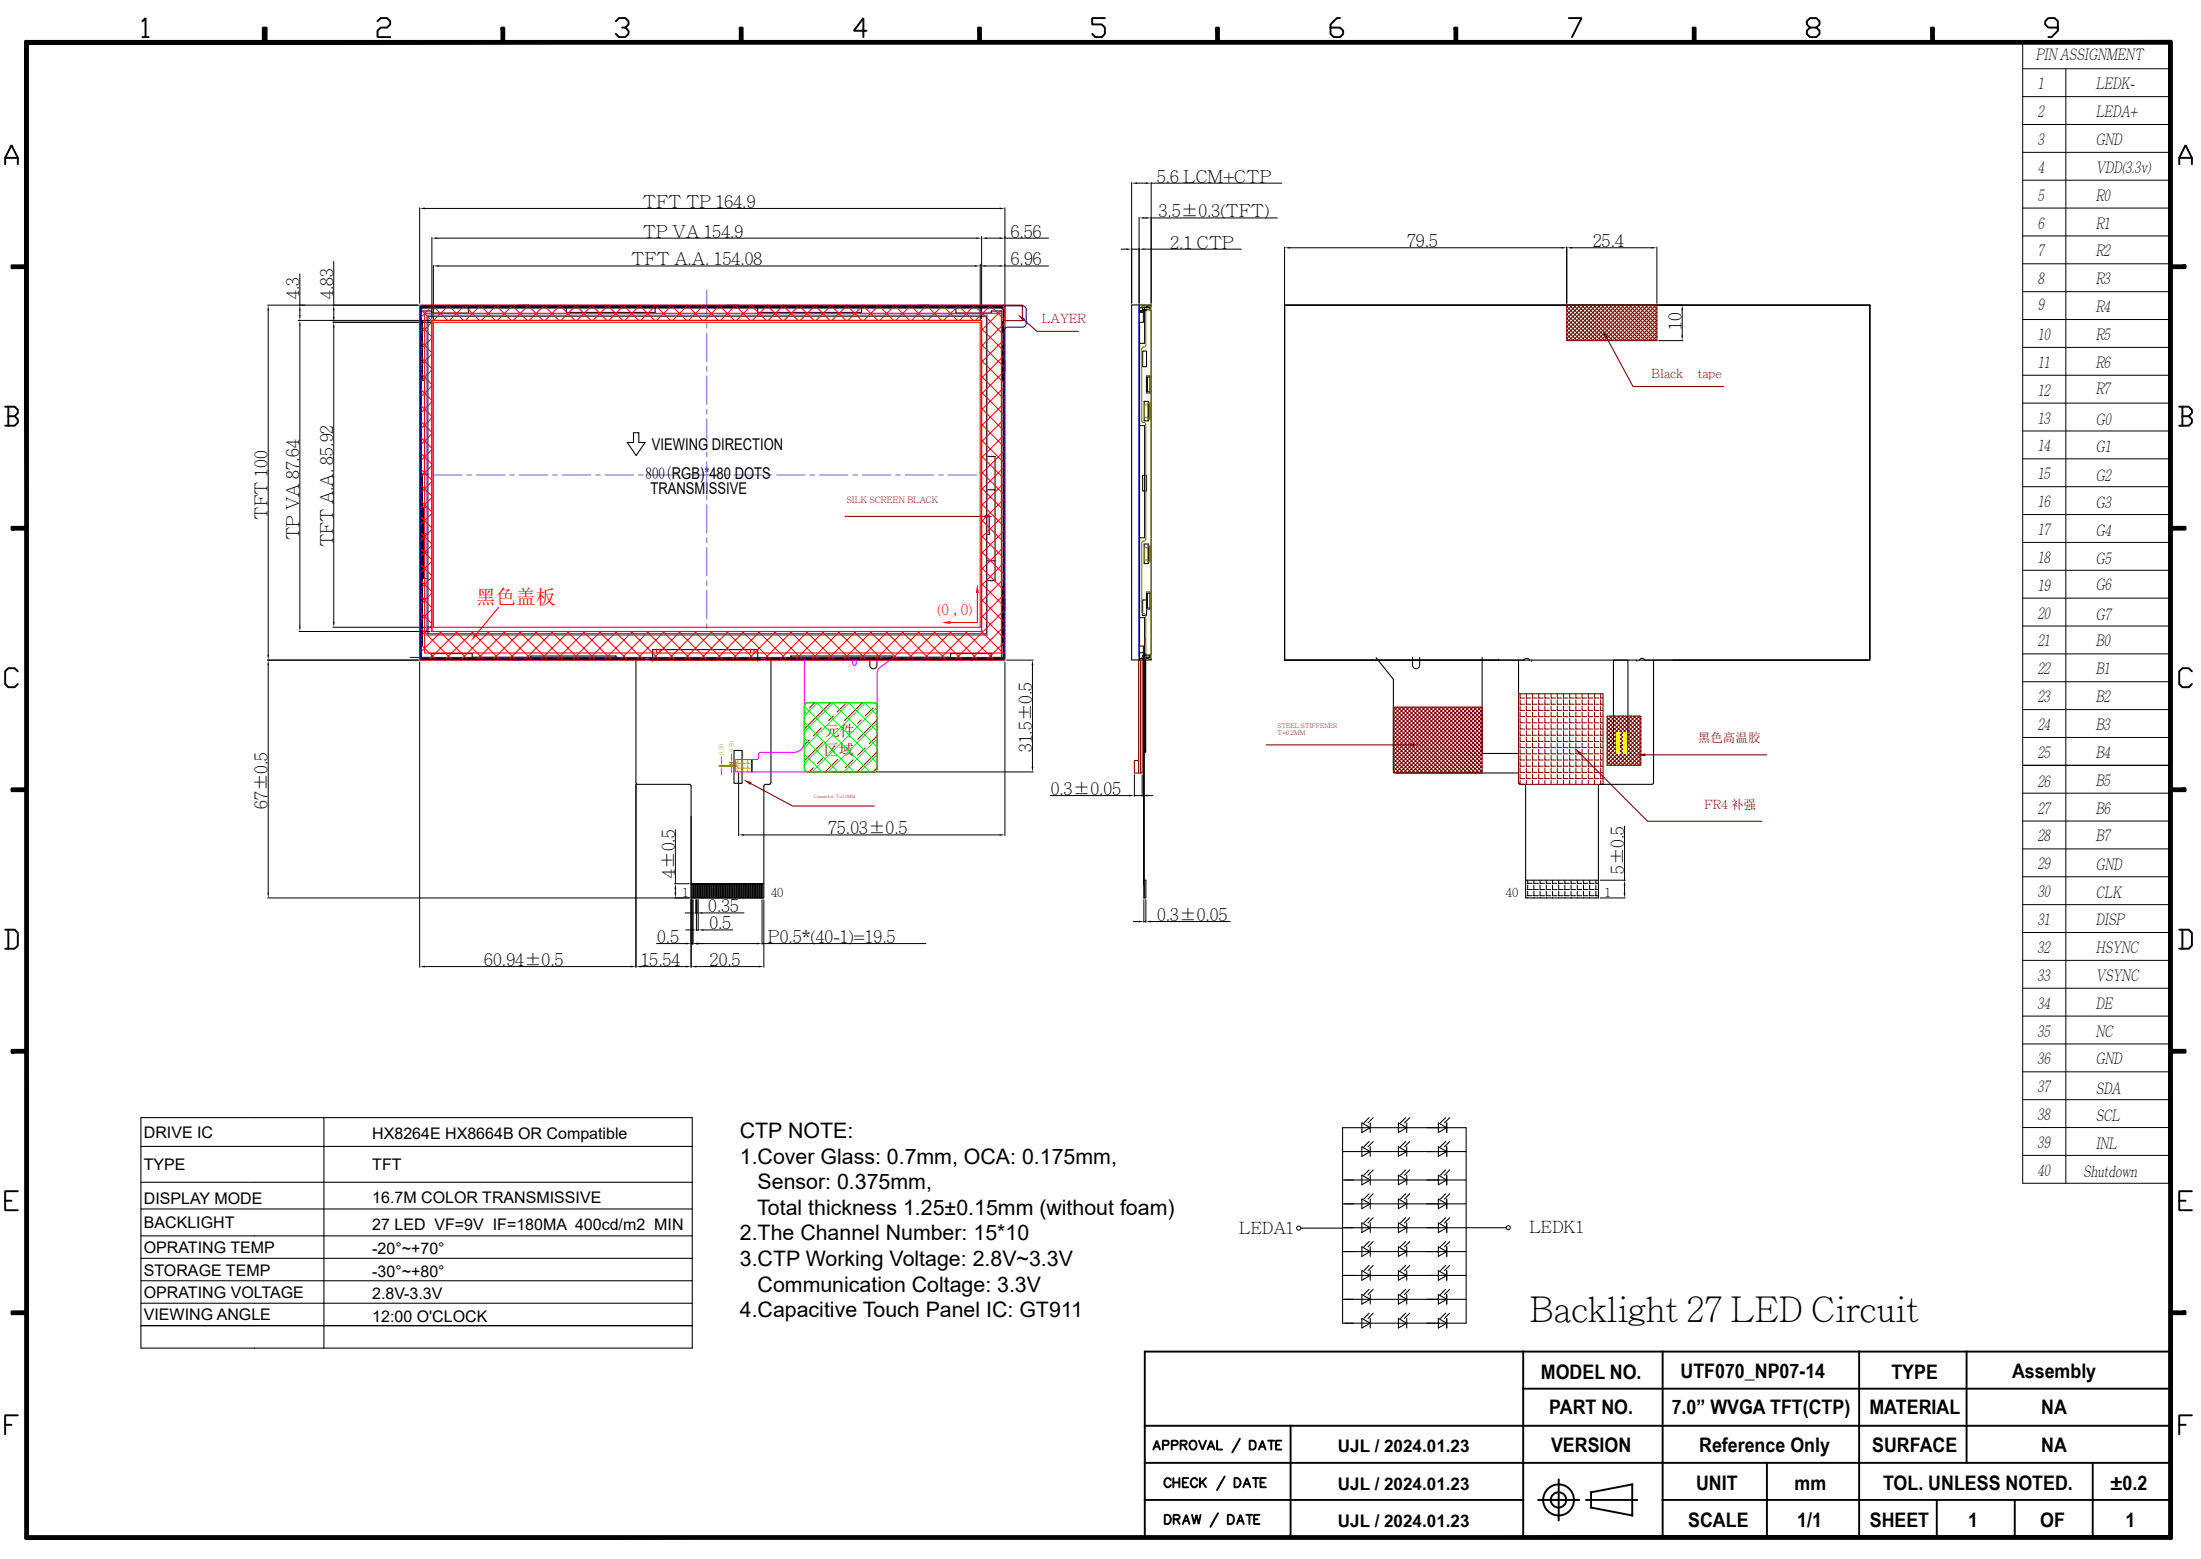

DRIVE IC	HX8264E HX8664B OR Compatible
TYPE	TFT
DISPLAY MODE	16.7M COLOR TRANSMISSIVE
BACKLIGHT	27 LED VF=9V IF=180MA 400cd/m2 MIN
OPRATING TEMP	-20°~+70°
STORAGE TEMP	-30°~+80°
OPRATING VOLTAGE	2.8V-3.3V
VIEWING ANGLE	12:00 O'CLOCK

CTP NOTE:
1.Cover Glass: 0.7mm, OCA: 0.175mm,
Sensor: 0.375mm,
Total thickness 1.25±0.15mm (without foam)
2.The Channel Number: 15*10
3.CTP Working Voltage: 2.8V~3.3V
Communication Coltage: 3.3V
4.Capacitive Touch Panel IC: GT911

PIN ASSIGNMENT	
1	LEDK-
2	LEDA+
3	GND
4	VDD(3.3v)
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	SDA
38	SCL
39	INL
40	Shutdown

		MODEL NO.	UTF070_NP07-14	TYPE	Assembly			
		PART NO.	7.0" WVGA TFT(CTP)	MATERIAL	NA			
APPROVAL / DATE	UJL / 2024.01.23	VERSION	Reference Only		SURFACE	NA		
CHECK / DATE	UJL / 2024.01.23		UNIT	mm	TOL. UNLESS NOTED.		±0.2	
DRAW / DATE	UJL / 2024.01.23		SCALE	1/1	SHEET	1	OF	1